


High efficiency, High output Mountable in areas along the sea or with high ammonia levels

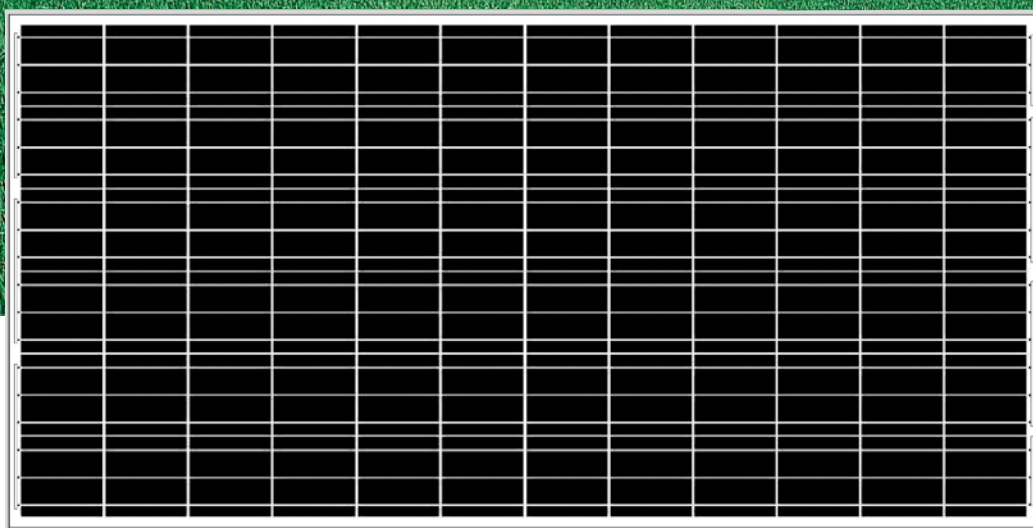

ESP6-72-295-325/SI

■ Polycrystalline module (6 inches x 72 cells) ■

■ Features



Industrial use
High-efficiency polycrystalline module



Offers high module conversion efficiency.



Low-reflection glass for enhanced light absorption



Cleans dust, etc., from the surface together with rainwater and reduces generation loss.



Gives high output even in the early morning, evening, cloudy days, or rainy days.



Durability bearing large loads
(Max. wind pressure: 2400 Pa,
Max. snow resistance: 5400 Pa)



Superior salt damage resistance and ammonia resistance



25-year output warranty

■ Reliable quality

- Positive tolerance (0 to +5 W) output is warranted.
- All products are double-EL inspected to eliminate defects completely.
- Stabilized current improves the generation amount of the system.



